


COBRA

ESSENTIAL WRAP-AROUND COMFORT

The essential all rounder with a panoramic visual field! Wrap-around fit without any visual interference, COBRA offers 180° vision and perfect optical quality. The option of swapping the temples for an adjustable strap and foam seal means COBRA is a highly versatile model.

PLATINUM

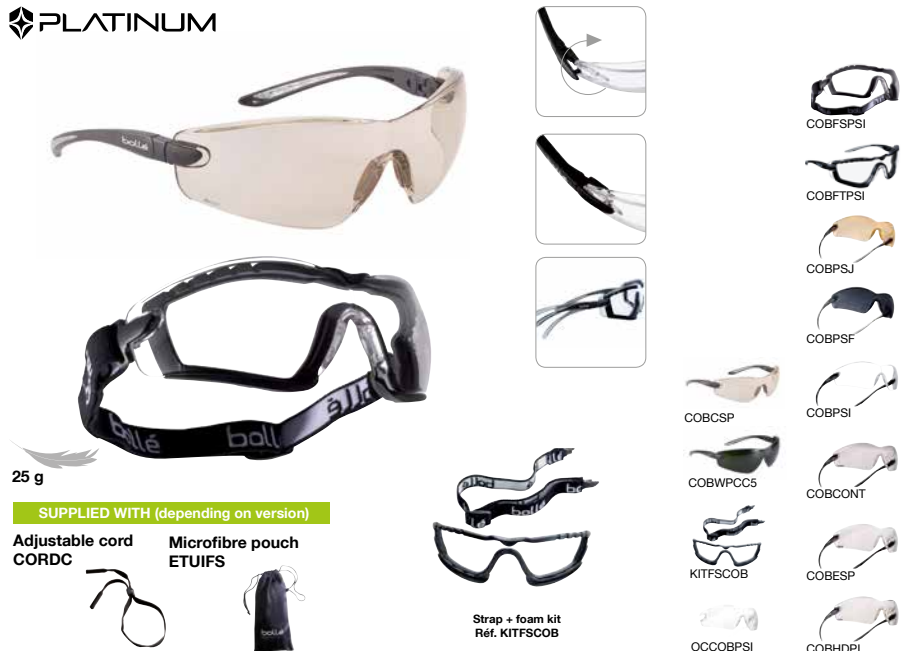

25 g

SUPPLIED WITH (depending on version)

Adjustable cord CORDC Microfibre pouch ETUIFS

Strap + foam kit
Réf. KITFSCOB

- + 1 PRODUCT = 2 USES
- + UPPER PROTECTION
- + PANORAMIC VISION
- + NON-SLIP BRIDGE
- + COMFORTABLE, NON-SLIP STRAIGHT TEMPLES
- + TEMPLE OR STRAP VERSION WITH INTERCHANGEABLE FOAM
- + PIVOTING TEMPLES

bolle
SAFETY

COBRA

ESSENTIAL WRAP-AROUND COMFORT

MODEL	VERSIONS	REFERENCES	LENS MARKING	FRAME MARKING	COATINGS
COBRA Strap + foam version	Clear	COBFSPSI	2C-1.2 ☞ 1 BT KN €€	☞ EN166 3 BT €€	Anti-scratch/Anti-fog (☞)
	Clear	COBFTPSI	2C-1.2 ☞ 1 BT KN €€	☞ EN166 FT €€	Anti-scratch/Anti-fog (☞)
COBRA Temples + foam version	Clear	COBFSPSI	2C-1.2 ☞ 1 BT KN €€	☞ EN166 FT €€	Anti-scratch/Anti-fog (☞)
Transformation kit	Strap + foam	KITFSCOB	-	-	-
COBRA temple version	Clear	COBPSI	2C-1.2 ☞ 1 BT KN €€	☞ EN166 FT €€	Anti-scratch/Anti-fog (☞)
	Comfort yellow	COBPSJ	2C-1.2 ☞ 1 BT €€	☞ EN166 FT €€	ASAF
	B-CONTRAST	COBCONT	5-1.1/1.4 ☞ 1 BT €€	☞ EN166 FT €€	ASAF
	B-CSP	COBCSP	5-1.4 ☞ 1 BT KN €€	☞ EN166 FT €€	Anti-scratch/Anti-fog (☞)
	B-ESP	COBESP	5-1.4 ☞ 1 BT €€	☞ EN166 FT €€	ASAF
	B-HD	COBHDP	2C-1.2 ☞ 1 BT €€	☞ EN166 FT €€	Hydrophobic/Anti-reflective/AS
	Welding shade 5	COBWPCC5	5 ☞ 1 BT €€	☞ EN166 FT €€	Anti-scratch/Anti-fog (☞)
Spare lens	Clear	OCCOBPSI	2C-1.2 ☞ 1 BT €€	-	ASAF

LENS MARKING

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles (optional)

N. Resistance to fogging (optional)

€€ European standard ☞ Manufacturer name

TECHNOLOGY

B-ESP

ESP. Extra sensory Perception, an innovative coating to reduce dazzle and the harmful affects of blue light. B-ESP filters 70% of blue light, 64% of visible light and 99.99% of UVA/UVB.

B-CONTRAST

A revolutionary coated, gradient lens offering better long term eye comfort. B-Contrast is particularly suited to wearers of safety glasses with clear lenses.

B-HD

A revolutionary coating for exceptional clarity and light transmission. It can be used for every type of job except those requiring solar protection in industrial fields. Unlike any other lens, wearers forget they are protected by the HD coating. Its visible light transmission rate is 96% compared with 90% for conventional clear lenses. Featuring a hydrophobic coating as standard, B-HD is a real polymer barrier and resists water and dirty marks.

PLATINUM

This permanent coating on both sides of the lens gives them a high resistance to scratching, to the most aggressive chemicals and delays the onset of fogging. In all circumstances and at all times the PLATINUM® lens innovation guarantees your eyes improved protection.

B-CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments. CSP is also combined with the exclusive PLATINUM coating that sustainably combats fogging.



Europe Bollé Safety
95 rue Louis Guérin
89100 Villeurbanne - France
Tél. : 00 33 (0) 4 78 85 23 64
Fax : 00 33 (0) 4 78 85 28 56
contact@bolle-safety.com

bolle-safety.com

U.K. Bollé Safety
Unit C83 - Barwell Business Park Leatherhead Road - Chessington
Surrey - KT9 2NY
Tél. : 00 44 (0)208 391 4700
Fax : 00 44 (0)208 391 4733
e-mail : sales@bolle-safety.co.uk

bolle
SAFETY

FRAME MARKING

EN 166: guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s
Maximum protection for glasses.

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

€€ European standard ☞ Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

CLEANING AND STORAGE

CLEANING: The lenses should be cleaned regularly. Bollé Safety recommends only using the B-clean lens cleaning system.

MAINTENANCE: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

STORAGE: All products must be stored in a dry and clean environment.

30/08/2017